

MY26 OEM



Table of Contents

FORKS

30 mm	BRUNO 30	2
	BRUNO CARGO 32	3
	VELVET	4
32 mm	MIGO 9MM	6
	MIGO Boost	7
	RC32 9MM	8
	RC32 Boost	9
34 mm	BRUNO CARGO 34	10
	MIGO 34 Boost	11
	REZZA 29 Boost	12
	SLANT	15
	E-SWEEP Boost	16
	E-SLIDE Boost	17
36 mm	TRACE 36	19
	RV1 27.5 DH	20
38 mm	VENGEANCE 38	18
	RV1 29 DH	19

SHOCKS

REZZA	25
02 PRO R/RL/RLR/RLX	26-27
H3A	28-29
H3C	30

SEAT POSTS

Manic LC	31
Manic Gravel	31
Manic	32
Manic C	33
E-Manic	34-35

Spec Chart	35-38
XFUSION Carbon Mission	38
Distributor and Service center	39

Product Use Chart

	CITY&CARGO	GRAVEL	XC	TRAIL	ALL MOUNTAIN	FREERIDE	DH
20 INCH	BRUNO CARGO 32						
	BRUNO CARGO 34						
26 INCH			VELVET				
				SLANT			
27.5 INCH			RC32 9MM				
			RC32 Boost				
			MIG Boost				
				E-SWEEP Boost			
29 INCH		BRUNO 30					
			RC32 Boost				
			MIGO 9MM				
			MIGO Boost				
			MIGO 34 Boost				
			REZZA 29 Boost				
				E-SLIDE Boost			
				TRACE 36			
				VEGEANCE 38			
							RV1_38mm
REAR SHOCKS			REZZA				
			02 Pro R/RL/RLR/RLX				
					H3C		
					H3A		
POSTS	Manic C	Manic Gravel					
				Manic			
				Manic LC			
				E-Manic			

Brake Size Chart

	STANDARD	MAX
BRUNO 30 BRUNO CARGO 32 VELVET MIGO 9MM MIGO Boost RC32 9MM RC32 Boost	160 post mount	
BRUNO CARGO 34 MIGO 34 Boost REZZA 29 Boost SLANT E-SWEEP Boost E-SLIDE Boost TRACE 36 RV1 VENGEANCE 38 RV1_38mm	180 post mount	203mm

XFusion Mission

Since 1999, XFusion has obsessively focused on producing the highest performance, highest quality and highest value suspension products for mountain bikes.

New for MY26

REZZA 29 Boost

- Weight : 1510 grams
- Wheel Size : 29 inch
- Travel : 100mm-120mm
- Axle : Thru Axle 110x15mm

REZZA

- Weight : 250 grams
- Spring : Air
- Adjustments : Rebound, Lockout or 3 Positions Comp.
- Sizes : Metric, Trunnion

VENGEANCE 38

- Weight : 2400 grams
- Wheel Size : 29 inch
- Travel : 160mm, 170mm, 180mm
- Axle : Thru Axle 110x15mm Boost

RV1 29 DH

- Weight : 2950 grams
- Wheel Size : 29 inch
- Travel : 200mm
- Axle : Thru Axle 110x20mm Boost

01

NEW FOR MY26

02

FORKS



BRUNO 30 Series

30mm Stanchion Tube 29 Inch Wheel Fork Up To 100mm of Travel

BRUNO 30

Weight	2810 grams(STKM)
Wheel Size	29 inch
Travel	60mm, 70mm, 100mm
Stanchion	30mm(STKM)
Spring	Coil(Soft, Standard, Firm), Air spring
Damper	RC Damper, LO
Adjustments	1.Compression,Rebound, Preload spring 2.Lock without Rebound
Steerer	1-1/8th, Taper Standard
Axle	Thru Axle 100x15mm
Offset	44mm



BRUNO CARGO 32 Series

32mm Stanchion Tube 20 Inch Wheel Fork Up To 50mm of Travel **Compatible with ABS System**

BRUNO CARGO 32

Weight	2850 grams
Wheel Size	20 inch
Travel	50mm, 70mm
Stanchion	32mm(STKM)
Spring	Coil
Damper	LO
Adjustments	Lockout, Preload spring
Steerer	1-1/8, Taper Standard
Axle	Thru Axle 110x15mm Boost
Offset	38mm
Standard Colors	Matte Black



03

FORKS

04

FORKS



VELVET Series *Special Kid's Bike Tune Available*

32mm Stanchion Tube 26 Inch Wheel Fork Up To 140mm of Travel

VELVET RL2

Weight	3.8 pounds / 1720 grams
Wheel Size	26 / 27.5 inch
Travel	80mm, 100mm, 120mm, 140mm
Stanchion	32mm Ano aluminum
Spring	Air
Damper	RL2 aluminum
Adjustments	Lockout, Rebound, Air spring
Steerer	1-1/8th, Tapered option
Axle	9mm, Lock-X 15mm option
Options	Lock-X 15mm, Tapered option, Quick Flip remote
Offset	41mm
Standard Colors	Gloss black, Matte black



Quick Flip Remote for RL2 forks

KIDS BIKE PRESSURE CHART	
RIDER WEIGHT LBS/KG	SPING COIL
80lbs/36kg	50 PSI/3.4 Bar
90lbs/41kg	52.5 PSI/3.6 Bar
100lbs/45kg	55 PSI/3.8 Bar
110lbs/50kg	57.5 PSI/4 Bar
120lbs/54kg	60 PSI/4.1 Bar
130lbs/59kg	65 PSI/4.5 Bar
140lbs/63kg	70 PSI/4.8 Bar
150lbs/68kg	75 PSI/5.1 Bar
160lbs/73kg	80 PSI/5.5 Bar
170lbs/77kg	85 PSI/5.8 Bar
180lbs/82kg	90 PSI/6.2 Bar
190lbs/86kg	95 PSI/6.5 Bar



05

FORKS



06

FORKS



MIGO 9MM Series

32mm Stanchion Tube 27.5, 29 Inch Wheel Fork Up To 130mm of Travel



MIGO 9mm 27.5

Weight	3230 grams(STKM) / 2680 grams(AL)
Wheel Size	27.5 inch
Travel	100mm, 120mm, 130mm
Stanchion	32mm(STKM, Cr-Plating / AL)
Spring	Coil(Soft, Standard, Firm), Air spring
Damper	RC Damper, LO
Adjustments	1.Compression,Rebound, Preload spring 2.Lock without Rebound
Steerer	Taper Standard(STKM)
Axle	9-100mm Dropout
Offset	46mm

MIGO 9mm 29

Weight	3200 grams(STKM) / 2650 grams(AL)
Wheel Size	29 inch
Travel	100mm, 120mm, 130mm
Stanchion	32mm(STKM, Cr-Plating / AL)
Spring	Coil(Soft, Standard, Firm), Air spring
Damper	RC Damper, LO
Adjustments	1.Compression,Rebound, Preload spring 2.Lock without Rebound
Steerer	Taper Standard(STKM)
Axle	9-100mm Dropout
Offset	51mm

07

FORKS

MIGO Boost Series

32mm Stanchion Tube 27.5, 29 Inch Wheel Fork Up To 130mm of Travel



MIGO Boost

Weight	3260 grams(STKM) / 2680 grams(AL) 3300 grams(STKM) / 2740 grams(AL)
Wheel Size	27.5 inch/29 inch
Travel	100mm, 120mm, 130mm
Stanchion	32mm(STKM, Cr-Plating / AL)
Spring	Coil(Soft, Standard, Firm), Air spring
Damper	RC Damper, LO
Adjustments	1.Compression,Rebound, Preload spring 2.Lock without Rebound
Steerer	Taper Standard(STKM)
Axle	Thru Axle 110x15mm Boost
Offset	27.5"-46mm 29"-51mm



08

FORKS



RC32 9MM Series

32mm Stanchion Tube 27.5 Inch Wheel Fork Up To 130mm of Travel

RC32 27.5	Weight	4.1 pounds / 1870 grams
	Wheel Size	27.5 inch
	Travel	80mm, 100mm, 130mm
	Stanchion	32mm Ano aluminum
	Spring	Air
	Damper	RC Damper
	Adjustments	Compression(open to firm), Rebound, Air spring
	Steerer	Taper Standard
	Axle	9mm
	Options	RC Remote
	Offset	46mm
	Standard Colors	Standard Colors: Matte Black, Gloss Black



RC32 Boost Series

32mm Stanchion Tube 27.5, 29 Inch Wheel Fork Up To 130mm of Travel

RC32 27.5 Boost	Weight	4.2 pounds / 1900 grams
	Wheel Size	27.5 inch
	Travel	80mm, 100mm, 130mm
	Stanchion	32mm Ano aluminum
	Spring	Air
	Damper	RC Damper
	Adjustments	Compression(open to firm), Rebound, Air spring
	Steerer	Taper Standard
	Axle	Thru Axle 110x15mm Boost
	Options	RC Remote
	Offset	46mm
	Standard Colors	Matte Black, Gloss Black

RC32 29 Boost	Weight	4.3 pounds / 1920 grams
	Wheel Size	29 inch
	Travel	80mm, 100mm, 130mm
	Stanchion	32mm Ano aluminum
	Spring	Air
	Damper	RC Damper
	Adjustments	Compression(open to firm), Rebound, Air spring
	Steerer	Taper Standard
	Axle	Thru Axle 110x15mm Boost
	Options	RC Remote
	Offset	51mm
	Standard Colors	Matte Black, Gloss Black



09

FORKS

10

FORKS

BRUNO CARGO 34 Series

34mm Stanchion Tube 20 Inch Wheel Fork Up To 100mm of Travel

Compatible with ABS System

BRUNO CARGO 34

Weight	3100 grams
Wheel Size	20 inch
Travel	80mm, 100mm
Stanchion	34mm (STKM)
Spring	Coil
Damper	LO
Adjustments	Lockout, Preload Spring
Steerer	Taper Standard
Axle	Thru Axle 110x15mm Boost
Offset	44mm
Standard Colors	Matte Black



11

FORKS

MIGO 34 Boost Series

34mm Stanchion Tube 27.5, 29 Inch Wheel Fork Up To 140mm of Travel



MIGO 34 27.5

Weight	3500 grams(STKM) / 3500 grams(AL)
Wheel Size	27.5 inch
Travel	120mm, 140mm, 160mm
Stanchion	34mm(STKM, Cr-Plating / AL)
Spring	Coil(Soft, Standard, Firm), Air spring
Damper	RC Damper, LO
Adjustments	1.Compression, Rebound, Preload spring 2.Lock without Rebound
Steerer	Taper Standard(STKM)
Axle	Thru Axle 110x15mm Boost
Offset	27.5"-46mm

MIGO 34 29

Weight	3550 grams(STKM) / 2950 grams(AL)
Wheel Size	29 inch
Travel	100mm, 120mm, 140mm
Stanchion	34mm(STKM, Cr-Plating / AL)
Spring	Coil(Soft, Standard, Firm), Air spring
Damper	RC Damper, LO
Adjustments	1.Compression, Rebound, Preload spring 2.Lock without Rebound
Steerer	Taper Standard(STKM)
Axle	Thru Axle 110x15mm Boost
Offset	29"-51mm



REZZA Series

34mm Stanchion Tube 29 Inch Wheel Fork Up To 120mm of Travel

**REZZA
29 Boost**

Weight	1450-1510 grams
Wheel Size	29 inch
Travel	100mm-120mm
Stanchion	34mm
Spring	Air
Damper	Finecut Damper
Adjustments	3 Position/RL
Steerer	1.5" Tapered
Axle	Thru Axle 110x15mm Boost
Options	Q Flip dual
Offset	44mm
Standard Colors	Matte Black, Gloss Black



Q Flip dual





SLANT Series *For DJ bike and KID bike*

34mm Stanchion Tube 26 Inch Wheel Fork Up To 160mm of Travel



Slant RC

Weight	4.2 pounds / 1900 grams
Wheel Size	26 inch
Travel	120mm, 140mm, 160mm
Stanchion	34mm Anodized aluminum
Spring	Air
Damper	RC Damper
Adjustments	Compression (open to firm), Rebound, Air spring
Steerer	Taper Standard
Axle	Lock-X 15mm
Options	RC Remote
Offset	40mm
Standard Colors	Matte Black, Gloss Black

*Kid bike
tune for
26 & 24
kid bike*

Slant Roughcut HLR

Weight	4.2 pounds / 1900 grams
Wheel Size	26 inch
Travel	120mm, 140mm, 160mm
Stanchion	34mm Anodized aluminum
Spring	Air
Damper	Roughcut HLR
Adjustments	HS comp, LS comp, Rebound, Air spring
Steerer	Taper Standard
Axle	Lock-X 15mm
Offset	40mm
Standard Colors	Matte Black, Gloss Black

Slant Roughcut RCP

Weight	4.2 pounds / 1900 grams
Wheel Size	26 inch
Travel	120mm, 140mm, 160mm
Stanchion	34mm Anodized aluminum
Spring	Air
Damper	Roughcut RCP
Adjustments	Three position platform, LS comp, Rebound, Air spring
Steerer	Taper Standard
Axle	Lock-X 15mm
Offset	40mm
Standard Colors	Matte Black, Gloss Black

16

FORKS

E-SWEEP Boost Series

34mm Stanchion Tube 27.5 Inch Wheel Fork Up To 160mm of Travel

E-Sweep Boost RC

Weight	4.4 pounds / 2000 grams
Wheel Size	27.5 inch
Travel	120mm, 140mm, 160mm
Stanchion	34mm Anod aluminum
Spring	Air
Damper	RC Damper
Adjustments	Compression(open to firm), Rebound, Air spring
Steerer	Taper Standard
Axle	Thru Axle 110x15mm Boost
Offset	46mm
Options	RC Remote



E-Sweep Boost Roughcut HLR

Weight	4.4 pounds / 2000 grams
Wheel Size	27.5 inch
Travel	120mm, 140mm, 160mm
Stanchion	34mm Anod aluminum
Spring	Air
Damper	Roughcut HLR
Adjustments	HS comp, LS comp, Rebound, Air spring
Steerer	Taper Standard
Axle	Thru Axle 110x15mm Boost
Offset	46mm

E-Sweep Boost Roughcut RCP

Weight	4.4 pounds / 2000 grams
Wheel Size	27.5 inch
Travel	120mm, 140mm, 160mm
Stanchion	34mm Anod aluminum
Spring	Air
Damper	Roughcut RCP
Adjustments	Three position platform, LS comp, Rebound, Air spring
Steerer	Taper Standard
Axle	Thru Axle 110x15mm Boost
Offset	46mm



E-SLIDE Boost Series

ABS Mount

34mm Stanchion Tube 29 Inch Wheel Fork Up To 140mm of Travel



E-Slide Boost RC

Weight	4.4 pounds / 2000 grams
Wheel Size	29 inch
Travel	100mm, 120mm, 140mm
Stanchion	34mm Anod aluminum
Spring	Air
Damper	RC Damper
Adjustments	Compression(open to firm), Rebound, Air spring
Steerer	Taper Standard
Axle	Thru Axle 110x15mm Boost
Offset	51mm & 44mm
Options	RC Remote

E-Slide Boost Roughcut HLR



Weight	4.4 pounds / 2000 grams
Wheel Size	29 inch
Travel	100mm, 120mm, 140mm
Stanchion	34mm Anod aluminum
Spring	Air
Damper	Roughcut HLR
Adjustments	HS comp, LS comp, Rebound, Air spring
Steerer	Taper Standard
Axle	Thru Axle 110x15mm Boost
Offset	51mm & 44mm

E-Slide Boost Roughcut RCP

Weight	4.4 pounds / 2000 grams
Wheel Size	29 inch
Travel	100mm, 120mm, 140mm
Stanchion	34mm Anod aluminum
Spring	Air
Damper	Roughcut RCP
Adjustments	Three position platform, LS comp, Rebound, Air spring
Steerer	Taper Standard
Axle	Thru Axle 110x15mm Boost
Offset	51mm & 44mm

17

FORKS

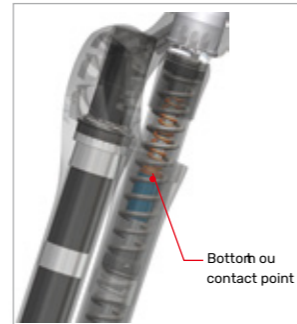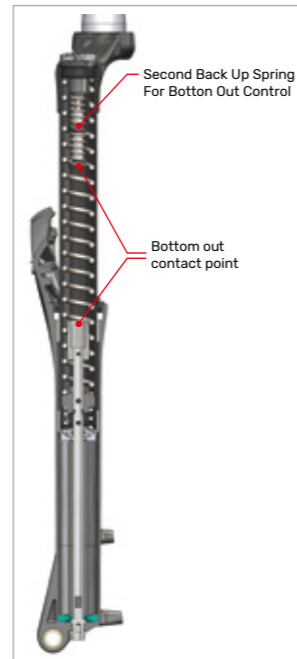

TRACE 36 Series

36mm Stanchion Tube 29 Inch Wheel Fork Up To 170mm of Travel

ABS Mount



Trace 36 RC

Weight 4.4 pounds / 2000 grams
 Wheel Size 29 inch
 Travel 140mm, 160mm, 170mm
 Stanchion 36mm Anodized aluminum
 Spring Coil(Soft, Standard, Firm), Air spring
 Damper RC Damper
 Adjustments Compression(Open to Firm), Rebound, Air spring or Preload spring
 Steerer Taper Standard
 Axle Thru Axle 110x15mm Boost
 Offset 51mm & 44mm
 Options RC Remote

Trace 36 Roughcut HLR

Weight 4.4 pounds / 2000 grams
 Wheel Size 29 inch
 Travel 140mm, 160mm, 170mm
 Stanchion 36mm Anodized aluminum
 Spring Coil(Soft, Standard, Firm), Air spring
 Damper Roughcut HLR
 Adjustments HS comp, LS comp, Rebound, Air spring or Preload spring
 Steerer Taper Standard
 Axle Thru Axle 110x15mm Boost
 Offset 51mm & 44mm

Trace 36 Roughcut RCP

Weight 5.3 pounds / 2400 grams
 Wheel Size 29 inch
 Travel 140mm, 160mm, 170mm
 Stanchion 36mm Anodized aluminum
 Spring Coil(Soft, Standard, Firm), Air spring
 Damper Roughcut RCP
 Adjustments 3 Positions platform, LS comp, Rebound, Air spring or Preload spring
 Steerer Taper Standard
 Axle Thru Axle 110x15mm Boost
 Offset 51mm & 44mm

*Second Back Up Spring For Bottom Out Control
 *10mm Travel Adjustment

20

FORKS

RV1 27.5 DH Series

36mm Stanchion Tube 27.5 Inch Wheel Fork Up To 200mm of Travel

RV1 Roughcut HLR

Weight	7.4 pounds / 3350 grams
Wheel Size	27.5 inch
Travel	200mm
Stanchion	36mm Anodized aluminum
Spring	Coil
Damper	Roughcut HLR
Adjustments	HS comp, LS comp, Rebound, Air spring
Steerer	1-1/8th dual crown
Axle	Thru Axle 110x20mm non Boost
Offset	46mm
Standard Colors	Matte Black



21

FORKS

Tall Crown for RV1

22

FORKS



VENGEANCE Series

38mm Stanchion Tube 29 Inch Wheel Fork Up To 180mm of Travel



VENGEANCE 38

Weight	2400 grams
Wheel Size	29 inch
Travel	160mm, 170mm, 180mm
Stanchion	38mm Anodized aluminum
Spring	Air
Damper	Finecut HLR
Adjustments	HS comp, LS comp, Rebound, Air spring
Steerer	Taper Standard
Axle	Thru Axle 110x15mm Boost
Offset	51mm & 44mm



RV1 29 DH Series

38mm Stanchion Tube 29 Inch Wheel Fork Up To 200mm of Travel

RV1 38mm Finecut HLR

Weight	2950 grams
Wheel Size	29 inch
Travel	200mm
Stanchion	38mm Anodized aluminum
Spring	Air
Damper	Finecut HLR
Adjustments	HS comp, LS comp, Rebound, Air spring
Steerer	1-1/8th
Axle	Thru Axle 110x20mm Boost
Offset	56mm & 46mm



23

FORKS




REZZA Series

High-Performance XC Air Shock

REZZA RL Weight 250 grams
 Spring Air
 Adjustments Rebound, Lockout
 Sizes All Standard and Metric
 Options Polymer Hardware

REZZA RLX Weight 250 grams
 Spring Air
 Adjustments Rebound, 3 Positions Comp.
 Sizes All Standard and Metric
 Options Polymer Hardware

REZZA RLR Weight 250 grams
 Spring Air
 Adjustments Rebound, Lockout or 3 Positions Comp.
 Sizes All Standard and Metric
 Options Polymer Hardware, 2 Positions or 3 Positions Q Flip dual

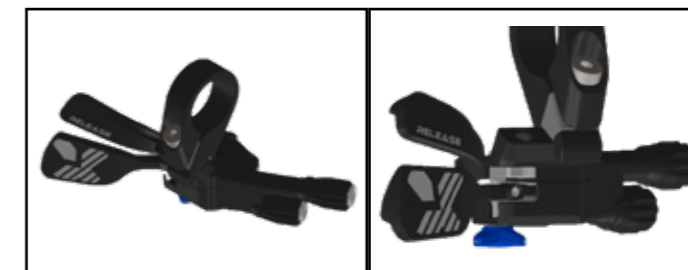

Q Flip dual



02 PRO Series

High-Performance All CNC-Machined Aluminum Air Shock



02 Pro R

Weight	265 grams
Spring	Air
Adjustments	Rebound, Air pressure
Sizes	All Standard and Metric
Options	AV Air Sleeve, Polymer Hardware



02 Pro RLX

Weight	265 grams
Spring	Air
Adjustments	3 Pos. Comp Adjust, Rebound, Air pressure
Sizes	All Standard and Metric
Options	AV Air Sleeve, Polymer Hardware



02 Pro RL

Weight	265 grams
Spring	Air
Adjustments	Lockout, Rebound, Air pressure
Sizes	All Standard and Metric
Options	AV Air Sleeve, Polymer Hardware, Quick Flip Remote, Lockout



Quick Flip Remote

28

SHOCKS



H3A Series

New piggyback Air shock, 3 positions platform, low speed, rebound

H3A HLR

Weight	545 grams(w/o spring)
Spring	Air
Adjustments	HS comp, LS comp, Rebound
Sizes	Metric, Trunnion
Options	Polymer Hardware

H3A RCP

Weight	515 grams(w/o spring)
Spring	Air
Adjustments	3 positions platform, Low speed, Rebound
Sizes	Metric, Trunnion
Options	Polymer Hardware



29

SHOCKS



H3C Series

New piggyback Coil shock, Three positions platform, low speed, rebound



H3C HLR

Weight 350 grams(w/o spring)
 Spring Coil
 Adjustments HS comp, LS comp, Rebound
 Sizes Metric 250/75 & Trunnion 225/75
 Options Polymer Hardware


H3C RCP

Weight 318 grams(w/o spring)
 Spring Coil
 Adjustments Three positions platform, Low speed, Rebound
 Sizes Metric, Trunnion
 Options Polymer Hardware



Dropper Seat Posts

Full range dropper seat posts line with internal routing

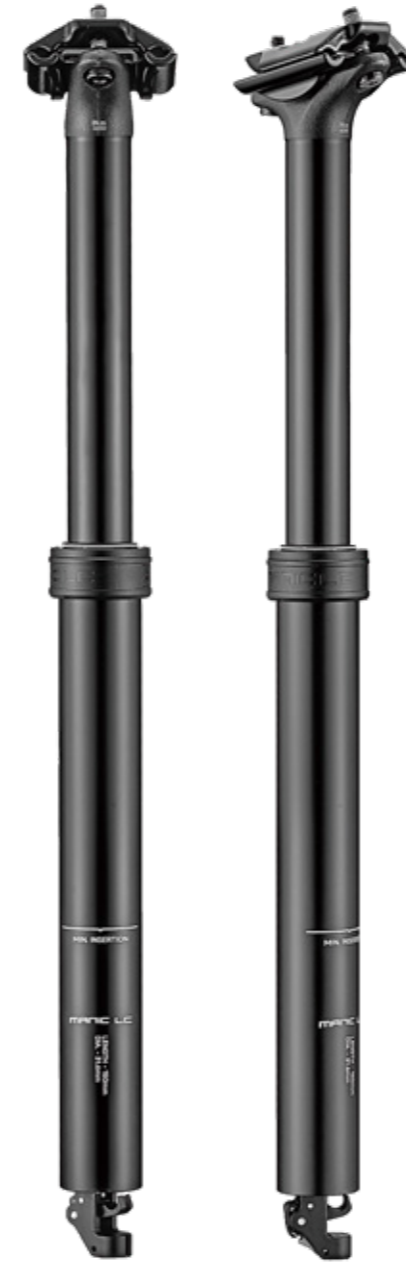

MANIC LC Series

Manic LC 100mm

Travel 100mm
 Weight 497 grams(30.9mm)
 Sizes 30.9mm, 31.6mm, 34.9mm
 Note Internal cable routing only

Manic LC 150mm

Travel 150mm
 Weight 603 grams(30.9mm)
 Sizes 30.9mm, 31.6mm, 34.9mm
 Note Internal cable routing only

Manic LC 125mm

Travel 125mm
 Weight 530 grams(30.9mm)
 Sizes 30.9mm, 31.6mm, 34.9mm
 Note Internal cable routing only

Manic LC 170mm

Travel 170mm
 Weight 636 grams(30.9mm)
 Sizes 30.9mm, 31.6mm, 34.9mm
 Note Internal cable routing only

MANIC GRAVEL Series

Manic 50mm

Travel 50mm
 Weight 420 grams
 Sizes 27.2mm
 Remote New two ways control remote system

MANIC Series

Manic 100mm
 Travel 100mm
 Weight 416 grams(30.9mm)
 Sizes 27.2mm, 30.9mm, 31.6mm and 34.9mm
 Note Internal cable routing only

Manic 125mm
 Travel 125mm
 Weight 459 grams(30.9mm)
 Sizes 30.9mm, 31.6mm and 34.9mm
 Note Internal cable routing only

Manic 150mm
 Travel 150mm
 Weight 521 grams(30.9mm)
 Sizes 30.9mm, 31.6mm and 34.9mm
 Note Internal cable routing only

Manic 170mm
 Travel 170mm
 Weight 550 grams(30.9mm)
 Sizes 30.9mm, 31.6mm and 34.9mm
 Note Internal cable routing only

Manic 190mm
 Travel 190mm
 Weight 689 grams
 Sizes 30.9mm, 31.6mm and 34.9mm
 Note Internal cable routing only

Manic 200mm
 Travel 200mm
 Weight 694 grams(34.9mm)
 Sizes 30.9mm, 31.6mm and 34.9mm
 Note Internal cable routing only



Remote Number	Remote type	Photo of remote	MANIC	MANIC LC	I-SPEC 2	I-SPEC EV	MMX
1	Alloy without angle adjustable remote		✓	✓	✓	✓	✓
2	Plastic without angle adjustable remote		✓	✓	✓	✓	✓
3	Entry Plastic standard remote		✓	✓			
4	Gravel two ways control remote		✓	✓			

MANIC C Series

Manic C
 Travel 35mm
 Weight 750 grams(30.9mm / 400mm)
 Sizes 30.9mm, 31.6mm
 Length Options 350mm, 400mm
 Spring Coil(Hard spring, Soft spring)
 Adjustment Internal Coil with preload adjust





E-MANIC Series

E-Manic

Travel 100mm, 125mm, 150mm, 170mm, 200mm
 Weight 682 grams(30.9mm / 150mm)
 Sizes 30.9mm, 31.6mm
 Length Options 330mm, 386mm, 441mm, 485mm, 551mm
 Connection Type Wireless



Battery Type: 18350 3.7V 850mAh
 Remote Battery: CR2032
 Charging cable Type: USB to Type-C



E-Manic Remote

20 INCH FORKS		
Family	BRUNO CARGO	BRUNO CARGO
Model name	BRUNO CARGO 32	BRUNO CARGO 34
Category	City&Cargo	City&Cargo
Target Wt. Lbs/Grams	2850g	3100g
Spring	Coil	Coil
Steerer/Material	1-1/8th, Taper Standard	Taper Standard
Damper	LO	LO
Adjustments	Lockout, Preload spring	Lockout, Preload spring
Offset	38mm	44mm
Axle	Thru Axle 110x15mm Boost	Thru Axle 110x15mm Boost
Standards Colors	Matte Black	Matte Black
Options		

26 INCH FORKS			
Family	VELVET	SLANT	
Model name	VELVET RL2	SLANT RC	SLANT Roughcut HLR
Category	XC/Trial		XC/Trial
Target Wt. Lbs/Grams	3.8/1720g		4.2/1900g
Spring	Air		Air
Steerer/Material	1-1/8th, Taper Standard		Taper Standard
Damper	RL2	RC	Roughcut HLR
Adjustments	Rebound, Lockout	Compression, Rebound, Air spring	HS comp, LS comp, Rebound, Air spring
Offset	41mm		40mm
Axle	9mm, Lock-X 15mm		Lock-X 15mm
Standards Colors	Matte Black, Gloss Black		Matte Black, Gloss Black
Options	Q Flip mono	RC Remote	

27.5 INCH FORKS									
Family	MIGO 9mm	MIGO Boost	MIGO 34 Boost	RC32 9mm	RC32 Boost	E-SWEEP	E-SWEEP Boost	E-SWEEP Boost	RV1
Model name	MIGO 27.5	MIGO 27.5 Boost	MIGO 34 27.5	RC32 27.5	RC32 27.5 Boost	E-SWEEP Boost RC	E-SWEEP Boost Roughcut HLR	E-SWEEP Boost Roughcut RCP	RV1 Roughcut HLR
Category	City&Trekking/XC/Trial	City&Trekking/XC/Trial	City&Trekking/XC/Trial	XC/Trial	XC/Trial		XC/Trial		AM/TR/DH
Target Wt. Lbs/Grams	7.2/3260g(STKM), 5.5/2500g(All)	7.2/3230g(STKM), 5.3/2350g(All)	7.8/3500g(STKM), 6.5/2900g(All)	4.1/1870g	4.2/1900g		4.4/2000g		7.4/3350g
Spring	Coil(Soft, Standard, Firm), Air spring	Coil(Soft, Standard, Firm), Air spring	Coil(Soft, Standard, Firm), Air spring	Air	Air		Air		S, M, F, XF Coil
Steerer/Material	Taper Standard	Taper Standard	Taper Standard	Taper Standard	Taper Standard		Taper Standard		1-1/8th dual crown
Damper	RC Damper, LO	RC Damper, LO	RC Damper, LO	RC Damper	RC Damper	RC Damper	Roughcut HLR	Roughcut RCP	Roughcut HLR
Adjustments	1.Compression, Rebound, Preload spring 2.Lock without Rebound	1.Compression, Rebound, Preload spring 2.Lock without Rebound	1.Compression, Rebound, Preload spring 2.Lock without Rebound	Compression(open to firm), Rebound, Air spring	Compression(open to firm), Rebound, Air spring	Compression(open to firm), Rebound, Air spring	HS comp, LS comp, Rebound, Air spring	3 Positions platform, LS comp,Rebound, Air spring	HS comp, LS comp, Rebound, Air spring
Offset	46mm	46mm	45mm	46mm	46mm		46mm		46mm
Axle	9-100mm Dropout	Thru Axle 110x15mm Boost	Thru Axle 110x15mm Boost	9-100mm Dropout	Thru Axle 110x15mm Boost		Thru Axle 110x15mm Boost		Thru Axle 110x20mm non Boost
Standards Colors	Matte Black, Gloss Black	Matte Black, Gloss Black	Matte Black, Gloss Black	Matte Black, Gloss Black	Matte Black, Gloss Black		Matte Black, Gloss Black		Matte Black
Options				RC Remote	RC Remote	RC Remote			

29 INCH FORKS									
Family	BRUNO	MIGO 9mm	MIGO Boost	RC32 Boost	REZZA Boost	MIGO 34 Boost	E-SLIDE Boost	E-SLIDE Boost	E-SLIDE Boost
Model name	BRUNO 30	MIGO 29	MIGO 29 Boost	RC32 29 Boost	REZZA 29 Boost	MIGO 34 29	E-SLIDE Boost RC	E-SLIDE Boost Roughcut HLR	E-SLIDE Boost Roughcut RCP
Category	City&Trekking/XC/Trial	City&Trekking/XC/Trial	City&Trekking/XC/Trial	XC/Trial	XC/Trial	XC/Trial		XC/TRAIL	
Target Wt. Lbs/Grams	2810g	7.3/3200g(STKM), 5.8/2640g(All)	7.3/3300g(STKM), 6/2740g(All)	4.1/1920g	1450-1510g	7.8/3500g(STKM), 6.5/2900g(All)		4.4/2000g	
Spring	Coil(Soft, Standard, Firm), Air spring	Coil(Soft, Standard, Firm), Air spring	Coil(Soft, Standard, Firm), Air spring	Air	Air	Coil(Soft, Standard, Firm), Air spring		Air	
Steerer/Material	1-1/8th, Taper Standard	Taper Standard	Taper Standard	Taper Standard	Taper Standard	Taper Standard		Taper Standard	
Damper	RC Damper, LO	RC Damper, LO	RC Damper, LO	RC Damper	RC Damper	RC Damper, LO	RC Damper	Roughcut HLR	Roughcut RCP
Adjustments	1.Compression, Rebound, Preload spring 2.Lock without Rebound	1.Compression, Rebound, Preload spring 2.Lock without Rebound	1.Compression, Rebound, Preload spring 2.Lock without Rebound	Compression(open to firm), Rebound, Air spring	3 Positions/RL	1.Compression, Rebound, Preload spring 2.Lock without Rebound	Compression(open to firm), Rebound, Air spring	HS comp, LS comp, Rebound, Air spring	3 Positions platform, LS comp, Rebound, Air spring
Offset	44mm	51mm	51mm	51mm	46mm	51mm		51mm & 44mm	
Axle	Thru Axle 100x15mm	9-100mm Dropout	Thru Axle 110x15mm Boost	Thru Axle 110x15mm Boost	Thru Axle 110x15mm Boost	Thru Axle 110x15mm Boost		Thru Axle 110x15mm Boost	
Standards Colors	Matte Black, Gloss Black	Matte Black, Gloss Black	Matte Black, Gloss Black	Matte Black, Gloss Black	Matte Black, Gloss Black	Matte Black, Gloss Black		Matte Black, Gloss Black	
Options				RC Remote	Q Flip dual		RC Remote		

29 INCH FORKS					
Family	TRACE 36			VENGEANCE	RV1
Model name	TRACE 36 RC	TRACE 36 Roughcut HLR	TRACE 36 Trail/AM/TR	VENGEANCE 38	RV1 38mm Finecut HLR
Category				Trail/AM/TR	AM/TR/DH
Target Wt. Lbs/Grams		4.4/2000g(Air) 5.3/2400g(Coil)		2460g	2950g
Spring		Coil(Soft, Standard, Firm), Air spring		Air	Air
Steerer/Material		Taper Standard		Taper Standard	Taper Standard
Damper	RC Damper	Roughcut HLR	Roughcut RCP	Finecut HLR	Finecut HLR
Adjustments	Compression/Open to Firm), Rebound, Air spring or	HS comp, LS comp, Rebound, Air spring or Preload spring	3 Positions platform, LS comp, Rebound, Air spring or Preload spring	HS comp, LS comp, Rebound, Air spring	HS comp, LS comp, Rebound, Air spring
Offset		51mm & 44mm		51mm & 44mm	56mm & 46mm
Axle		Thru Axle 110x15mm Boost		Thru Axle 110x15mm Boost	Thru Axle 110x20mm Boost
Standards Colors		Matte Black, Gloss Black		PMS 285C, PMS 466C	PMS 285C, PMS 466C
Options	RC Remote				

SHOCK II

SHOCKS											
Family	REZZA Series			O2 PRO Series				H3C Series		H3A Series	
Model	REZZA RL	REZZA RLX	REZZA RLR	O2 PRO R	O2 PRO RL	O2 PRO RLX	O2 PRO RLR	RCP	HLR	RCP	HLR
Category	XC/Trail			XC/Trail/AM				XC/Trail/AM	DH	XC/Trail/AM	DH
Target Wt. Lbs/Grams	190(250g)			165(265g), 184 AV(297g)	165(265g), 184 AV(297g)	165(265g), 200 AV(300g)	165(265g), 200 AV(300g)	318g(w/o spring)	350g(w/o spring)	515g(w/o spring)	545g(w/o spring)
Spring	Air			Air				Coil		Air	
Adjustments	Rebound, Lockout	Rebound, 3 Positions Comp.	Rebound, Lockout or 3 Positions Comp.	Rebound	Rebound, Lockout	Rebound, 3 Positions Comp.	Rebound, Lockout	3 Positions platform, LS comp, Rebound	HS comp, LS comp, Rebound	3 Positions platform, LS comp, Rebound	HS comp, LS comp, Rebound
Options											
Poly Hardware	Y	Y	Y	Y	Y	Y	Y	Y			Y
AV Sleeve				Y	Y	Y	Y				
Remote Lockout			Q Flip dual				Q Flip mono				

REAR SHOCK SIZE CHART								
Standard Mount			Metric Mount			Trunnion Mount		
Eye to Eye	Stroke	Model	Eye to Eye	Stroke	Model	Eye to Eye	Stroke	Model
165	38	O2 PRO	170	30/35	O2 PRO/REZZA	145	30/35	O2 PRO/REZZA
184	44	O2 PRO	190	40/45	O2 PRO/REZZA	165	40/45	O2 PRO/REZZA
190	51	O2 PRO	210	50/55	O2 PRO/H3C/H3A/REZZA	185	50/55	O2 PRO/H3C/H3A/REZZA
200	51	O2 PRO	230	60/65	O2 PRO/H3C/H3A	205	60/65	O2 PRO/H3C/H3A
200	56	O2 PRO	250	70	H3C DH/ H3A DH	225	75	H3C DH/ H3A DH
215	63	O2 PRO						

SEAT POST II

POSTS						
Family	MANIC C	MANIC GRAVEL	MANIC LC	MANIC		E-MANIC
Model	Manic C	Manic 50mm	Manic LC	Manic 100mm	Manic 125/150/170/190/200mm	E-manic
Category	City & Trekking	Gravel	XC/Trail/AM	XC/Trail/AM	XC/Trail/AM	XC/Trail/AM
Travel	35mm	50mm Infinite Adjust	100, 125, 150, 170mm infinite adjust	100mm infinite adjust	125, 150, 170, 190, 200mm infinite adjust	100, 125, 150, 170, 200mm Infinite Adjust
Weight Target	750g(30.9mm)	420g	497g(30.9/100mm), 530g(30.9/125mm), 603g(30.9/150mm), 636g(30.9/170mm)	416g(30.9)	459g(30.9/125mm), 521g(30.9/150mm), 550g(30.9/170mm), 689g(30.9/190mm), 694g(30.9/200mm)	669g(30.9/150mm)
Outer Post Material	Aluminum	Aluminum	Aluminum	Aluminum		Aluminum
Small Inner Shaft Material	Black Ano	Black Ano	Black Ano	Black Ano		Black Ano
OD	30.9mm, 31.6mm	27.2mm	30.9mm, 31.6mm, 34.9mm	27.2mm, 30.9mm, 31.6mm, 34.9mm	30.9mm, 31.6mm, 34.9mm	30.9mm, 31.6mm
Color	Black	Black	Black	Black	Black	Black
Remote		New two ways control remote system				E-Remote
Notes		Internal cable routing only	Internal cable routing only	Internal cable routing only	Internal cable routing only	

MY26 TECH DOCUMENT

20 Inch Forks	Category	Wheel Size	Stanchion	Spring	Travel	A to C	Max tire	Offset	Steerer		Axle Type				Style	Rotor Size
									v	v			v			
BRUNO CARGO 32	CITY&CARGO	20"	32mm	Coil	50, 70	385mm/50mm	61x532	38	v	v			v		Post 74mm	160
BRUNO CARGO 34	CITY&CARGO	20"	34mm	Coil	80, 100	422mm/100mm	61x532	44	v	v			v		180	203
26 Inch Forks	Category	Wheel Size	Stanchion	Spring	Travel	A to C	Max tire	Offset	Steerer	Axle Type				Style	Rotor Size	
VELVET	XC/Trail	26"	32mm	Air	80-140	519mm/140mm	62x705	42	v	v	v	v			Post 74mm	160
SLANT	XC/Trail	26"	34mm	Air	100-160	546mm/160mm	62x705	40		v		v			180	203
27.5 Inch Forks	Category	Wheel Size	Stanchion	Spring	Travel	A to C	Max Tire	Offset	Steerer	Axle Type				Style	Rotor Size	
MIGO 9mm 27.5	XC/Trail	27.5"	32mm	Coil/Air	100~130	520mm/130mm	61x714	46		v					160	203
MIGO 27.5 Boost	XC/Trail	27.5"	32mm	Coil/Air	80-130	520mm/130mm	61x714	46		v			v		160	
MIGO 34 27.5 Boost	XC/Trail	27.5"	32mm	Coil/Air	100-130	555mm/160mm	61x714	46		v			v		160	
RC32 9mm	XC/Trail	27.5"	32mm	Air	80-120	510mm/120mm	61x714	46		v	v			160		
RC32 27.5 Boost	XC/Trail	27.5"	32mm	Air	80-130	520mm/130mm	61x714	46		v			v		160	
E-Sweep Boost	XC/Trail	27.5"	34mm	Air	120-160	551mm/160mm	63x723	46		v			v		180	
RV1	AM/FR/DH	27.5"	36mm	Coil	200	574mm/200mm	62x705	46	v				v		180	
29 Inch Forks	Category	Wheel Size	Stanchion	Spring	Travel	A to C	Max Tire	Offset	Steerer	Axle Type				Style	Rotor Size	
BRUNO 30	GRAVEL/XC	29"	30mm	Coil/Air	60, 70, 100	515/100mm	63x759	44	v	v		v			160	203
MIGO 9mm 29	XC/Trail	29"	32mm	Coil/Air	80-130	545mm/130mm	68x759	51		v	v				160	
MIGO 29 Boost	XC/Trail	29"	32mm	Coil/Air	80-130	545mm/130mm	68x759	51		v			v		160	
RC32 29 Boost	XC/Trail	29"	32mm	Air	80-130	540mm/130mm	63x759	51		v			v		160	
REZZA 29 Boost	XC/Trail	29"	34mm	Air	100~120	531mm/120mm	68x759	44		v			v		180	
MIGO 34 29 Boost	XC/Trail	29"	34mm	Coil/Air	100-140	555mm/140mm	68x759	51		v			v		180	
E-SLIDE Boost	XC/Trail	29"	34mm	Air	100-140	551mm/140mm	68x760	448.51		v			v		180	
TRACE 36	Trail/AM/FR	29"	36mm	Air	140-170	581mm/170mm	68x760	448.51		v			v		180	
VENGEANCE 38	Trail/AM/FR	29"	38mm	Air	160-180	596mm/180mm	68x762	448.51		v			v		180	
RV1 38mm	AM/FR/DH	29"	38mm	Air	200	610mm/200mm	68x762	468.56	v				v		203	

Posts	Category	Insertion Depth 1	Length 2	Sizes	Travel
Manic 50mm	Gravel	100/110/120mm	315/350/380mm	27.2	50mm
Manic 100mm	XC/Trail	110mm	350mm	27.2	100mm
Manic 100mm	XC/Trail	80mm	310mm	30.9/31.6/34.9	100mm
Manic 125mm	XC/Trail/AM	90mm	361mm	30.9/31.6/34.9	125mm
Manic 150mm	XC/Trail/AM	100mm	425mm	30.9/31.6/34.9	150mm
Manic 170mm	XC/Trail/AM	130mm	469mm	30.9/31.6/34.9	170mm
Manic 190mm	XC/Trail/AM	140mm	521mm	30.9/31.6/34.9	190mm
Manic 200mm	XC/Trail/AM	150mm	531mm	30.9/31.6/34.9	200mm
Manic LC 100mm	XC/Trail	80mm	310mm	30.9/31.6/34.9	100mm
Manic LC 125mm	XC/Trail/AM	90mm	361mm	30.9/31.6/34.9	125mm
Manic LC 150mm	XC/Trail/AM	100mm	425mm	30.9/31.6/34.9	150mm
Manic LC 170mm	XC/Trail/AM	140mm	469mm	30.9/31.6/34.9	170mm
E-MANIC	Category	Insertion Depth 1	Length 2	Sizes	Travel
E-Manic 100mm	XC/Trail	80mm	330mm	30.9/31.6	100mm
E-Manic 125mm	XC/Trail/AM	90mm	386mm	30.9/31.6	125mm
E-Manic 150mm	XC/Trail/AM	100mm	441mm	30.9/31.6	150mm
E-Manic 170mm	XC/Trail/AM	130mm	485mm	30.9/31.6	170mm
E-Manic 200mm	XC/Trail/AM	150mm	551mm	30.9/31.6	200mm
MANIC C	Category	Insertion Depth 1	Length 2	Sizes	Travel
MANIC C	City & Trekking	65mm	350/400mm	30.9/31.6	35mm

XFUSION is executing a low-carbon and green energy transformation strategy since **2015**.



980 980 households are supported by power that we reduce a year(3,659,886KWH).

About **1,928** tons of carbon dioxide has been reduced by XFUSION.

XFUSION

we are committing to produce **ECO-friendly** products.



UNITED STATES - OFFICIAL SERVICE CENTER
MAD SUSPENSION SERVICE INC
Tel: (775) 391-0783
E-Mail: service@madsuspension.com
add: 4690 Longley Ave, Suite 22, Reno, Nevada, 89502
website: madsuspension.com

EUROPEAN SERVICE HEADQUARTERS
LEMON SHOX
Tel: 0911 / 27460066
E-Mail: mail@lemonshox.com
add: Schleifweg 53 90409 Nürnberg Germany
website: www.lemonshox.com

ANDORRA
ASZ DISTRIBUTION
Tel: +34 652735383
E-Mail: asiersainz01@gmail.com
add: The immaculate 25 48903 Barakaldo (Bizkaia)
website: http://www.asz-distribucion.com

ANDORRA(SERVICE)
ORING SUSPENSION CENTER
Tel: +34947719014 Mobile: +34722459002
E-Mail: Taller@oringsuspensiones.com
add: Calle Juan de Padilla N°6 Bajo 09006 Burgos
website: https://oringsuspensiones.com/

AUSTRALIA(EAST)-CW WORKS
Tel: 0424 755 114
E-Mail: cwworksau@gmail.com
add: 127 Amber Crescent, Narre Warren, Victoria 3805 Australia

AUSTRALIA(WEST)-RnR Suspension Specialists
Tel: 0428 263 668
E-Mail: rnsuspensionspecialist@gmail.com
add: 2/12 Laurence Road, Walliston 6076 Australia
website: https://www.rnsuspensionspecialists.com/

BELGIUM
VD SPORT IMPORT
Tel: +31 (0) 629321900
E-Mail: info@x-fusionshox.nl
add: Boterwijksestraat 11 5688 HX Oirschot The Netherlands
website: www.x-fusionshox.nl

BENELUX
VD SPORT IMPORT
Tel: +31 (0) 629321900
E-Mail: info@x-fusionshox.nl
add: Boterwijksestraat 11 5688 HX Oirschot The Netherlands
website: www.x-fusionshox.nl

BRAZIL
SCITEX IMP. COM. E SERV. LTDA.
Tel: (11) 5587-3662
E-Mail: Scitex@scitex.com.br
add: Rua Carneiro Da Cunha, 872 Sao Paulo, SP-04144-001
website: www.scitex.com.br

BULGARIA
VELOMANIA LTD.
Tel: 00359 2 812 70 60
E-Mail: info@velomania-bg.com
add: "Gueshevo", Street 83 1330 Sofia
website: www.velomania-bg.com

CANADA (EAST)
S4 SUSPENSION
Tel: 450-504-1148
E-Mail: gcaron@s4suspension.com
add: 801 Rue Pasteur, Unit 103 Saint-Jérôme, Quebec, J7Z 0E2
website: www.s4suspension.com

CANADA (WEST)
SERVICE ONLY SUSPENSION WERX
Tel: 778-340-2013
E-Mail: info@suspensionwerx.com
add: 1443 Hunter Street North Vancouver, BC, V7A 1H3
website: www.suspensionwerx.com

CHILE
BIKEPLANET CHILE SPA (SALES)
Tel: +56-9-92261093
E-Mail: ventas@bikeplanet.cl
add: LOS REFUGIOS 19000 P55 LO BARNECHEA SANTIAGO

CHINA
VOLARE
Tel: +86 0769 26981212
E-Mail: 124428661@qq.com
add: 2F, 328 Tianxin Village Hongyuan Road Nancheng District Dongguan City
website: https://www.volare.com.cn/

CZECH REPUBLIC SERVICE - SPORT PORT
ORING SUSPENSION CENTER
Tel: +420 773 776 964
E-Mail: mancik@sportport.cz
add: Kačírkova 982/4, Praha 5 Jinonice, 158 00. CZECH REPUBLIC
website: https://www.sportport.cz/en/uvod/

CZECH REPUBLIC SERVICE
KG BIKE
Tel: +420 608018374
E-Mail: goabike@seznam.cz
add: Kamil Giercuszkiwicz Jaselská 1195/2 Havířov, 73601

FRANCE
EXACYCLE
Tel: 06 33 20 42 44
E-Mail: info@exacycle.com
add: 254 chemin des vignes 01500 Château-Gaillard (Ain)
website: https://www.facebook.com/EXACYCLE/

FRANCE
ROYAL SUSPENSION
Tel: +33 6 98 91 30 48
E-Mail: royal@suspension@yahoo.fr
add: Pont-À-Mousson, Lorraine
website: www.royalsuspension.com

HUNGARY
MR-PROJEKT BIKES
Tel: +36-70-318-317-8
E-Mail: info@mr-projekt.com
add: Jerikó u. 25. Debrecen Hajdú-Bihar 4032

GERMANY
LEMON SHOX
Tel: 0911 / 27460066
Tel: mail@lemonshox.com
add: Schleifweg 53 90409 Nürnberg Germany
website: http://www.lemonshox.com/

INDONESIA
PT. WAHANA INTI UTAMA
Tel: +6221 8170178168
E-Mail: frans.suryadi@bab-indonesia.com
add: Jl. Alam Sutera Boulevard No.12a, Pakulonan, Serpong, Kota Tangerang Selatan, Banten 15325, Indonesia

ITALY
SS38 Bike Lana
Tel: +39 0473 491186
E-Mail: info@ss38-bike.it
add: Via Merano, 7, 39011 Lana BZ, ITALY
website: https://www.mtb-suedtirol.com/

ISRAEL
RANOFUN
Tel: +972-49522334
E-Mail: ranofun@gmail.com
add: Shavei Zion Road 3, PO Box 92 Zip Code 22806
website: http://ranofun.co.il/

JAPAN
GRAVITY LABS
Tel: +81 27-288-8177
E-Mail: gravitylab191@gmail.com
add: Kogure 421-4 Maebashi Huzumityou Gunmakan, 371-0103
website: www.gravity-lab.com

KOREA
GS OUTDOOR
Tel: +82 070 8600 0846
E-Mail: gsoutdoor@naver.com
add: 1119-1 Kwanyang-dong Anyang-sh
website: www.gsoutdoor.co.kr

LUXEMBURG
VD SPORT IMPORT
Tel: +31 (0) 629321900
E-Mail: info@x-fusionshox.nl
add: Boterwijksestraat 11 5688 HX Oirschot The Netherlands
website: www.x-fusionshox.nl

MALAYSIA
SEN AIK TRADING
Tel: 603-33431050
E-Mail: yeann@senaik.com
add: 12-1-1, Jalan Setia Prima Q U13/Q, Setia Alam, Sek U13, 40170 Shah Alam, Selangor Darul Ehsan
website: www.senaik.com

MEXICO
ELITE BIKE(SCOTT Bikes only)
Tel: +52 871 716 0795
E-Mail: alma.fraire@elitebike-mx.com
add: Blvd. Independencia Ote. 1199 Col. San Isidro, Torreón, Coah. MX, C.P. 27100
website: http://www.elitebike.mx/

MEXICO
DOS BIKEXTORE
Tel: (+52)442 688 48 92
E-Mail: hola@bikextore.com
add: Av. Prolongacion Tecnologica 700, Local 1, Plaza Los Fresnos Mexico
website: https://www.bikextore.com/

MEXICO
VELOCI
Tel: 52 (01 33) 32383-1160
E-Mail: veloci@veloci.com.mx
add: No.76, Colonia Agua Blanca Industrial Zapopan, Jalisco Mexico, C.P. 45235
website: www.veloci.com.mx

NETHERLANDS
VD SPORT IMPORT
Tel: +31 (0) 629321900
E-Mail: info@x-fusionshox.nl
add: Boterwijksestraat 11 5688 HX Oirschot
website: www.x-fusionshox.nl

NEW ZEALAND - Shockcraft
Tel: +64 3 976 7790
E-Mail: sales@shockcraft.co.nz
add: 58 Boundary Road, Alexandra 9320, NZ
website: https://www.shockcraft.co.nz/

PERU
STORM BIKE'S SAC
Tel: +51(01)333 0102
E-Mail: info@stormbikes.com.pe
add: Av. Emancipacion 835 interior 304-148 Lima, Perú
website: www.stormbikes.com.pe

PHILIPPINES
PEREGRINE MARKETING
Tel: +032 233 0352
E-Mail: sales@peregrinebike.com
add: E.O. Perez St. Subangdaku, North Reclamation, Mandaue City, Cebu

PHILIPPINES
FAREN ENTERPRISES
Tel: 09177750544
E-Mail: sam_estimo@yahoo.com
E-Mail: 59-Bansalagin Street, Project 7, Quezon City, Metro Manila
website: www.bikes.com.ph

PHILIPPINES
CHEAB BICYCLE PARTS SUPPLY
Tel: +09774703626
E-Mail: realbikeshop@yahoo.com
add: 104 QUEZON PIAPU BOULEVARD Davao Cit Philippines 8000

POLAND
SPIDER SUSPENSIONS
Tel: +48 515 687 787
E-Mail: biuro@spidersuspensions.com
add: ul. 1 Maja 251 41-710 Ruda Śląska
website: spidersuspensions.com/pl/home/

PORTUGAL
SERVICE ORING SUSPENSION CENTER
Tel: +34947719014 Mobile: +34722459002
E-Mail: Taller@oringsuspensiones.com
add: Calle Juan de Padilla N°6 Bajo 09006 Burgos
website: https://oringsuspensiones.com/

PORTUGAL
ASZ DISTRIBUTION
Tel: +34 652735383
E-Mail: asiersainz01@gmail.com
add: The immaculate 25 48903 Barakaldo (Bizkaia)
website: http://www.asz-distribucion.com

ROMANIA
VELOMANIA LTD.
Tel: 00359 2 812 70 60
E-Mail: info@velomania-bg.com
add: "Gueshevo", Street 83 1330 Sofia
website: www.velomania-bg.com

RUSSIA
TEAMMANO CO.
Tel: +89162431170
E-Mail: shop@teammano.ru
add: Москва, Щелковское шоссе, д. 3, стр. 1, ТЦ "Хобби, павильон 179, 1-й этаж
website: https://teammano.ru/

SINGAPORE - Custom Bike Co.
Tel: +65 88220122
Tel: custombikecosg@gmail.com
add: 2 Jalan Lokam, #01-02, Kensington Square, Singapore 537846, (Along Upper Paya Lebar Road)
website: https://www.facebook.com/CBCSG/

SLOVENIA
COMTRON D.O.O.
Tel: 02 3003 515
E-Mail: rene.vrecl@comtron.si
add: Tržaška cesta 21, 2000 Maribor Slovenia
website: www.akcija.si/bikes

SPAIN
SERVICE ORING SUSPENSION CENTER
Tel: +34947719014 Mobile: +34722459002
E-Mail: Taller@oringsuspensiones.com
add: Calle Juan de Padilla N°6 Bajo 09006 Burgos
website: https://oringsuspensiones.com/

SPAIN
ASZ DISTRIBUTION
Tel: +34 652735383
E-Mail: asiersainz01@gmail.com
add: The immaculate 25 48903 Barakaldo (Bizkaia)
website: http://www.asz-distribucion.com

SOUTH AFRICA
SERVICE ROBBIE'S BICYCLE CONCEPT
Tel: 071 331 8834
E-Mail: robbie@robbiesbicycleconcept.co.za
add: Unit 8, Moffett Business Centre, 104 Restitution Road, Port Elizabeth
website: www.robbiesbicycleconcept.co.za

SWITZERLAND
SUSPENSION CENTER
Tel: +41 (0) 31 809 30 20
E-Mail: info@center.ch
add: Gurnigelstrasse 11 CH-3132 Riggisberg
website: www.suspensioncenter.ch

TAIWAN
IRON STABLE
Tel: 04 25575422
E-Mail: contact@ironstable.com.tw
add: No. 260, Kuang-Cheng Lane, Nei-Tung Rd Houli Shiang, Taichung Country
website: www.ironstable.com.tw

THAILAND
RAJA CYCLE CO., LTD.
Tel: +66 2703 6818
add: 417 M.2 Bangplee-Tamru Road, Phrekasamai, Muang, Samutprakarn, Thailand 10280
website: www.optima.bike

TURKEY
KRON BISIKLET A.S.
Tel: 444 68 10
E-Mail: info@kronbisiklet.com.tr
add: Tepeoren Mah, San. Bolg. 7, #11 Istanbul Tuzla, 34959
website: www.kronbisiklet.com.tr

UKRAINE
Beneo@pic ROVER
Tel: +38-0955892559
E-Mail: info@veloservice.if.ua
add: Nadrichna 2, Ivano-Frankivsk
website: http://veloservice.if.ua/

UNITED KINGDOM
UPGRADE BIKES LTD
Tel: +44 (0) 1403 711 611
E-Mail: info@upgradebikes.co.uk
add: Star Road Unit A/B, Partridge Green, West Sussex, RH13 8RA
website: http://www.upgradebikes.co.uk

UNITED STATES
J&B IMPORTERS, INC.
Tel: (305) 238-1866
add: 11925 SW 128th St, Miami, FL 33186

UNITED STATES
QUALITY BICYCLE PRODUCTS
Tel: (952) 941-9391
E-Mail: sales@qbp.com
add: 6400 W 105th Street Bloomington, MN 55438
website: www.qbp.com

UNITED STATES
BICYCLE TECHNOLOGIES INTERNATIONAL
Tel: (800) 558-8324
E-Mail: accounts@bti-usa.com
add: 33 Velocity Way Santa Fe, New Mexico 87508
website: bti-usa.com



XFUSIONSHOX.COM

XFUSION

